

# LOC RWY 22




CALDWELL / ESSEX COUNTY (CDW)

LOC I-CDW <b>109.35</b>	APP CRS <b>223°</b>	Rwy Idg <b>4418</b>
		TDZE <b>173</b>
		Apt Elev <b>173</b>

When local altimeter setting not received, use Newark altimeter setting and increase all MDA 60 feet. Increase S-22 Cat B, C and D and Circling Cat C visibility ¼ mile; and, for KOLLI INT minimums increase S-22 Cat C and D visibility ¼ mile, and Circling Cat C visibility ½ mile. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 via I-CDW NE course to SNAFU OM/INT and hold, continue climb-in-hold to 2600.

ATIS <b>135.5</b>	NEW YORK APP CON <b>127.6 379.9</b>	CALDWELL TOWER ★ <b>119.8 (CTAF) 0</b>	GND CON <b>121.9</b>	CLNC DEL <b>121.1</b>	UNICOM <b>122.95</b>
----------------------	--	---	-------------------------	--------------------------	-------------------------

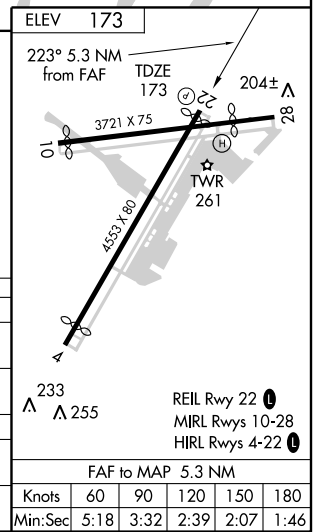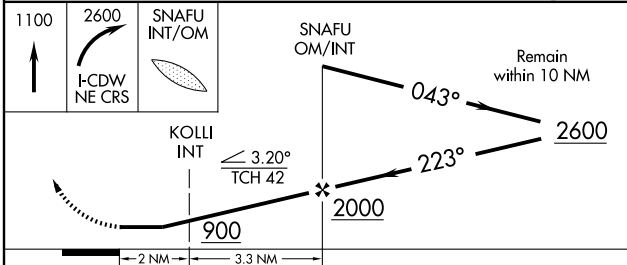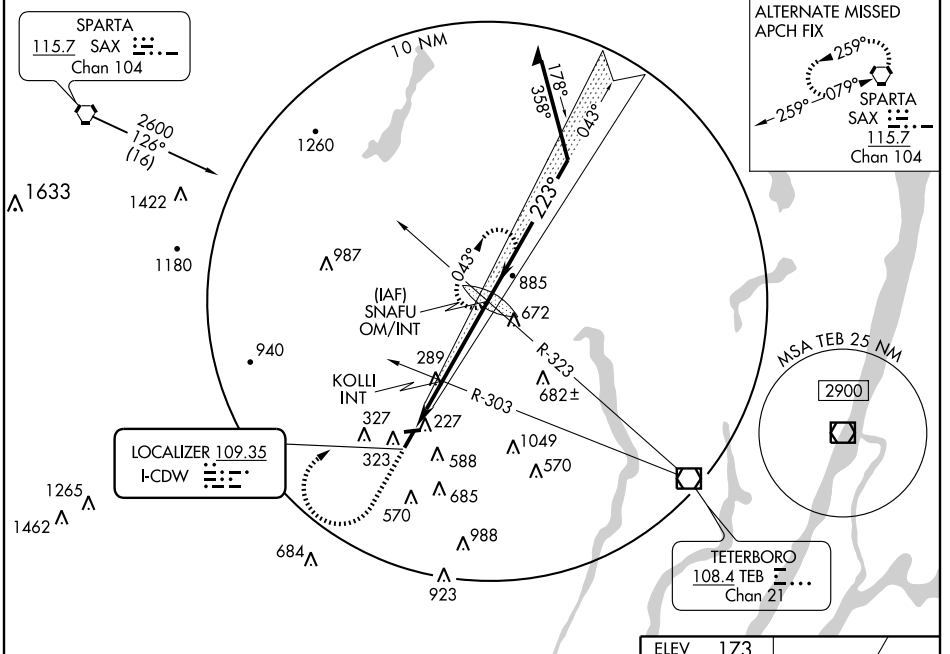

CATEGORY	A	B	C	D
S-22	900-1 727 (800-1)		900-2 727 (800-2)	900-2½ 727 (800-2½)
CIRCLING	940-1 767 (800-1)	980-1¼ 807 (900-1¼)	1020-2½ 847 (900-2½)	1080-3 907 (1000-3)
KOLLI INT MINIMUMS				
S-22	540-1 367 (400-1)		540-1¼ 367 (400-1¼)	
CIRCLING	940-1 767 (800-1)	980-1¼ 807 (900-1¼)	1020-2½ 847 (900-2½)	1080-3 907 (1000-3)

ELEV	173
223° 5.3 NM from FAF	TDZE 173
204± 28	
3721 X 75	
4531 X 80	
TWR 261	
REIL Rwy 22 0	
MIRL Rwys 10-28	
HIRL Rwys 4-22 0	
FAF to MAP 5.3 NM	
Knots	60 90 120 150 180
Min:Sec	5:18 3:32 2:39 2:07 1:46

NE-2, 03 JUN 2010 to 01 JUL 2010

NE-2, 03 JUN 2010 to 01 JUL 2010